


LG RIB

TIRE SIZE	15X6.00 -6
UM	IS STANDARD
MACHINERY	MOWER / SMALL TRACTOR / TRACTOR
VERSION	STANDARD
TL/TT	TL

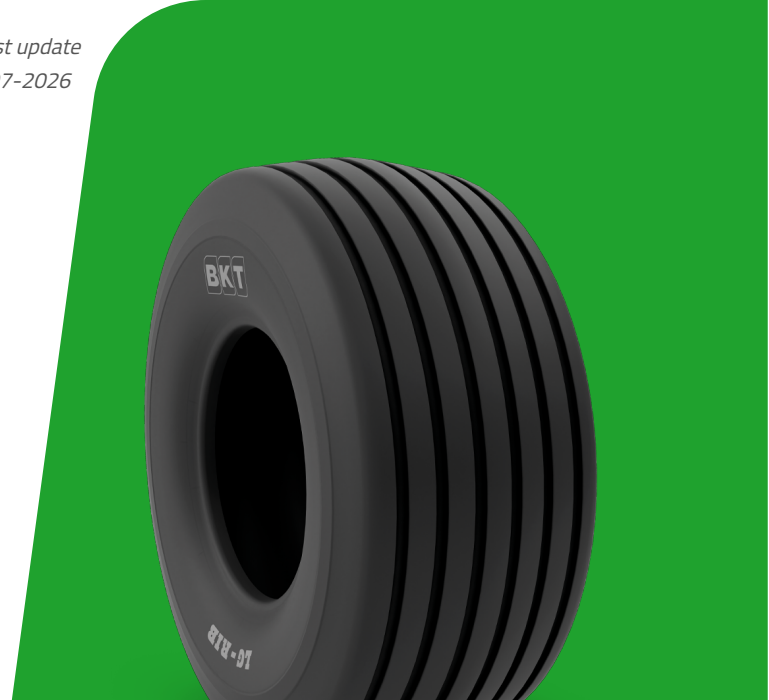

DIMENSIONS IS STANDARD

SW (MM)	152	ECE	E11-106R-003466
OD (MM)	365	PR	4
SLR (MM)	159	TREAD DEPTH (MM)	3,5
RC (MM)	1059	TKPH (TK/H)	0
RIM REC	4.50 A		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	2.10
15	257

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.