


LG RIB

TIRE SIZE	16X6.50 -8
UM	IS STANDARD
MACHINERY	MOWER / SMALL TRACTOR / TRACTOR
VERSION	STANDARD
TL/TT	TT

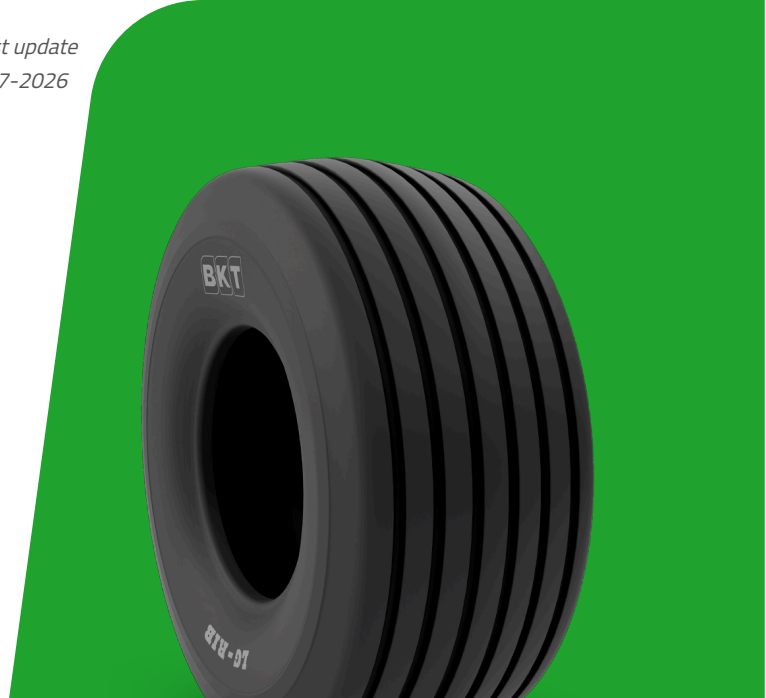

DIMENSIONS IS STANDARD

SW (MM)	170	ECE	E11-106R-003467
OD (MM)	408	PR	4
SLR (MM)	182	TREAD DEPTH (MM)	2
RC (MM)	1183	TKPH (TK/H)	0
RIM REC	5.375 I - 55 ; I - 70 ; I - 90		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	1.90
15	280

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.