


LG RIB

TIRE SIZE	20X10.00 -10
UM	IS STANDARD
MACHINERY	MOWER / SMALL TRACTOR / TRACTOR
VERSION	STANDARD
TL/TT	TL

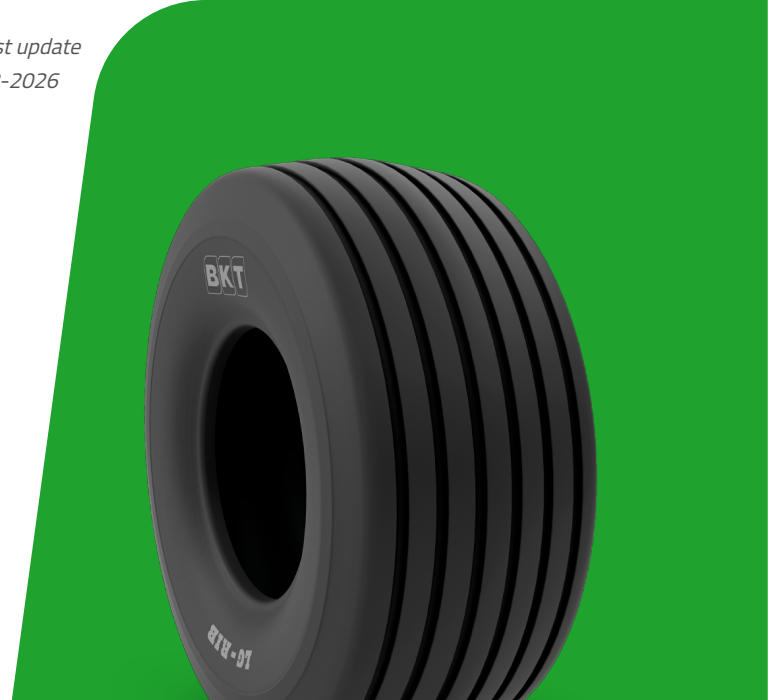

DIMENSIONS IS STANDARD

SW (MM)	236	RIM ALT	7.00 I - 55 ; I - 70 ; I - 90
OD (MM)	498	ECE	E11-106R-003469
SLR (MM)	222	PR	4
RC (MM)	1444	TREAD DEPTH (MM)	6
RIM REC	8.00 I - 55 ; I - 70 ; I - 90		

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	1.50
15	530

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.