


I - 1

TIRE SIZE	7.50 - 16 SL
UM	IS STANDARD
MACHINERY	IMPLEMENT MACHINERY / TRAILER / IMPLEMENTS
VERSION	STANDARD
TL/TT	TT

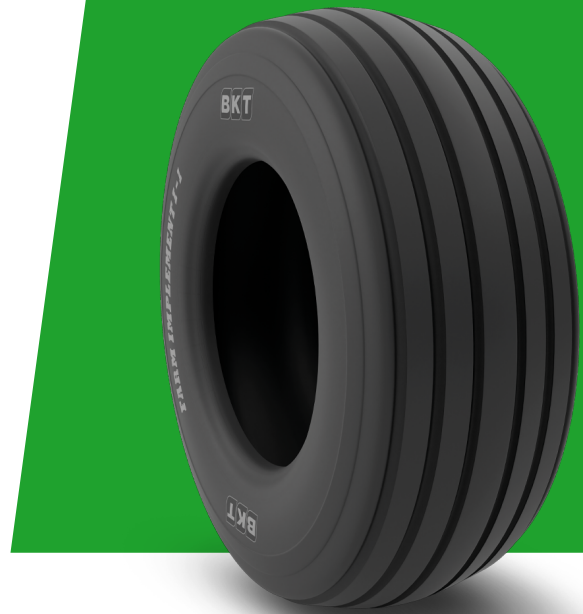

DIMENSIONS IS STANDARD

SW (MM)	205	RIM ALT	6 LB
OD (MM)	785	ECE	E11-106R-003522
SLR (MM)	350	PR	8
RC (MM)	2300	TRA CODE	I1
RIM REC	5.50 F	TREAD DEPTH (MM)	5,5

LOAD CAPACITY (KG/TIRE)

KM/H / BAR	3.30
65	1060

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.