


## I - 1

|                  |                                               |
|------------------|-----------------------------------------------|
| <b>TIRE SIZE</b> | <b>11 L - 16 SL</b>                           |
| <b>UM</b>        | IS STANDARD                                   |
| <b>MACHINERY</b> | IMPLEMENT MACHINERY / TRAILER /<br>IMPLEMENTS |
| <b>VERSION</b>   | STANDARD                                      |
| <b>TL/TT</b>     | TT                                            |

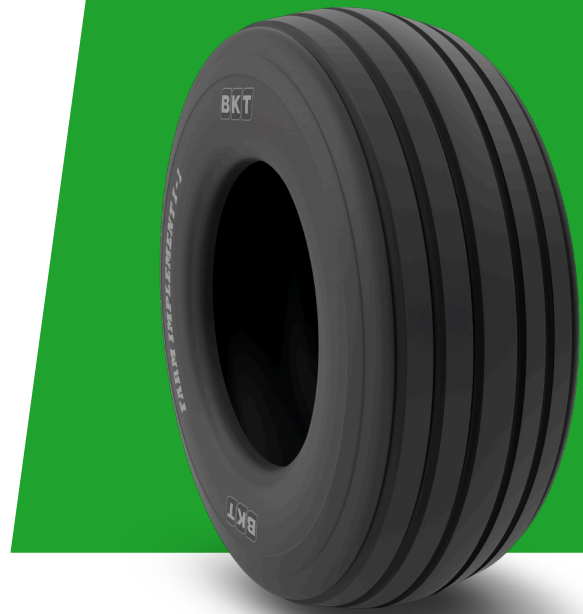

### DIMENSIONS IS STANDARD

|                 |      |                         |                 |
|-----------------|------|-------------------------|-----------------|
| <b>SW (MM)</b>  | 270  | <b>RIM ALT</b>          | 10 LB ; W 8 L   |
| <b>OD (MM)</b>  | 795  | <b>ECE</b>              | E11-106R-006675 |
| <b>SLR (MM)</b> | 355  | <b>PR</b>               | 8               |
| <b>RC (MM)</b>  | 2329 | <b>TRA CODE</b>         | I1              |
| <b>RIM REC</b>  | 8 LB | <b>TREAD DEPTH (MM)</b> | 8               |

### LOAD CAPACITY (KG/TIRE)

|                   |             |
|-------------------|-------------|
| <b>KM/H / BAR</b> | <b>2.50</b> |
| 65                | 1215        |

Rolling Circumference & SLR values are at rated Load and inflation pressure. These values may vary at different Load and pressure condition.